

m-y wedge™ INSTALLATION INSTRUCTIONS



MERCURY: 135–300 hp

HONDA: 75–250 hp

JOHNSON/EVINRUDE: 150–250 hp

JOHNSON V4, 4-stroke: 60–140 hp

TOHATSU: 115–250 hp


Works on these models:

Carb., EFI, Opti-Max, 2-stroke, 4-stroke,
Verado, Ficht and Offshore with 3-RAM Trim/
Tilt Systems.

Install on *Starboard Side* of MERCURY,
HONDA, JOHNSON / EVINRUDE, TOHATSU
Outboards.

1. Trim outboard to up position.
2. Simply slide *m-y wedge* on starboard side over Trim/Tilt piston of lower unit.
3. *m-y wedge* will position and self-center, slide completely down.
4. Trim outboard down until the rubber begins to compress and motor is secure.
5. To remove *m-y wedge* simply trim outboard to up position and remove.
6. Store *m-y wedge* in any boat compartment for convenience.

Note: We recommend that you rotate m-y wedge 1/4 to 1/2 turn each use. This helps even the compression of the EPDM Rubber on the unit.

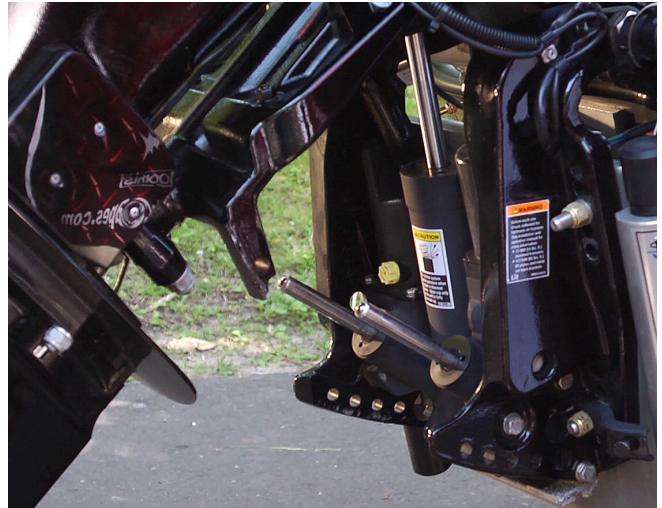

MERCURY: Installs on starboard side. Installs on trim/tilt piston. Self centers, just snug down to secure. Correct trailering height shown. No need to hold on to anything!